

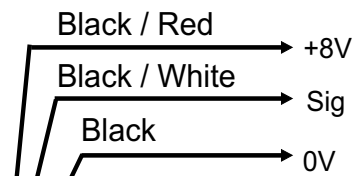
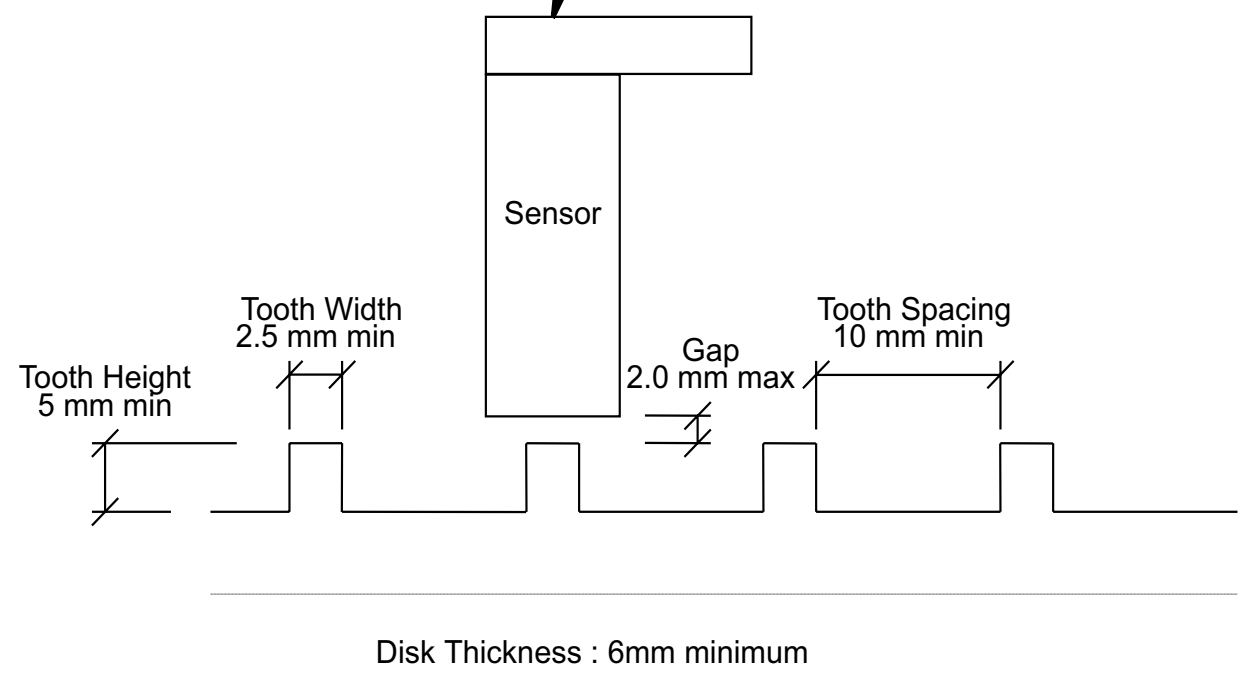
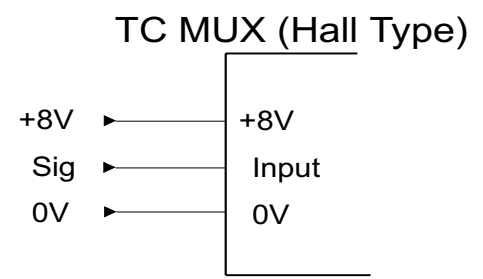


Operating Temp -40 to +150 deg C
 Output States Air : High
 Metal : Low (8 sec Hold Typ)

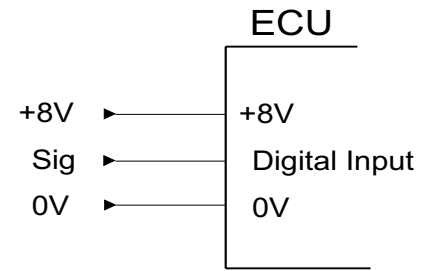

NOTE: Shielded Cable should used to connect sensor.

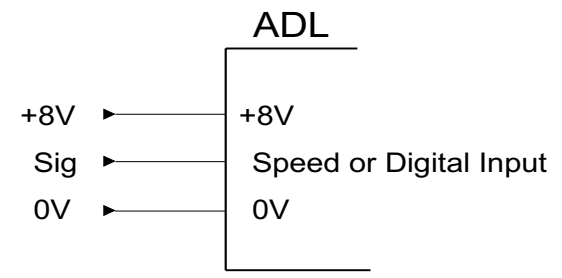

ADL Setup
 Speed setup.
 Select "HALL" Sensor type

When used for Traction Control the edge variation of the teeth must be less than 0.5% (to give 1KPH in 200KPH accuracy)
 eg. If the edge spacing is 20mm then the variation must be less than 0.1 mm.